

LIQUITOTE® IBC 793 GALLON



Hoover pioneered bulk handling with the Liquitote®, the first intermediate bulk container engineered for liquids. This IBC has become the industry standard for efficient, sensible handling of liquids. The 793 gallon Liquitote features a 10-gauge stainless steel top and body construction, and an 8-gauge sloped bottom, for easy and complete drainage. The 793 gallon Liquitote is UN marked and includes a one-year warranty. These rugged IBCs are manufactured in Hoover's ISO 9001 certified plant in Beatrice, Nebraska. Hoover offers a complete line of spare parts for all Hoover products.

CORNERS



Feature: 4-corner stainless steel reinforced offshore lifting lugs.

LID



Feature: 22", 16-gauge stainless steel drum cover, EPDM gasket, with fusible vent, clamp ring, bolt and nut.

Optional: 22" bolted lid, 3/16" stainless steel with a 12 bolt pattern, EPDM gasket, 5 in 1 combination pressure, vacuum, fusible vent, welded swing bolt with attached nut.

STACKABLE



Feature: Up to 2-high full.

FORK TUBES



Feature: 4-way fork tubes for all-side pick up.

BOTTOM OUTLET



Feature: 2" 316 stainless steel locking handle ball valve with adapter and dust cap.

TOP BUNG



Feature: Two, 2" top bungs with EPDM gaskets.

LEGS



Feature: Hoover's radius corner stainless steel legs.

Optional: Hoover's exclusive harmonic legs which have proven to withstand 10 times greater stress during lab testing.



Material:

304 stainless steel with 2B finish

Type:

10-gauge top & body and 8-gauge bottom construction

Manufacturer:

Hoover Materials Handling Group, Inc.
Beatrice, NE

Regulations Conformance:

UN31A - (Stamped 16 gauge Tag)

Capacity:

793 gallons / 3,000 liters

Base Dimensions:

54" (wide) x 54" (deep) x 77" (total height)

Truckload Capacity:

11 containers (tanks)

Additional Features:

Formed drum neck
Liquitote decal
8-1/2" legs
4-way fork entry tubes

Tare Weight:

1,010 lbs. / 404 kgs. nominal

Authorized gross weight:

13,456 lbs. / 6,103 kgs. maximum
(1.9 spg)





24" INTRASTACKING ADAPTER STAND

Allows IBC's with the industry standard 42" x 48" footprint to stack safely and securely with the 793 gallon Liquitote®.

LIQUITOTE SPECIFICATIONS

Nominal Capacity	Nominal Width	Nominal Length	Nominal Height	Approximate Tare Weight	Max Gross Weight	UN Marking
255 gal. (946 l)	42" (1066 mm)	42" (1066 mm)	45" (1143 mm)	405 lbs. (183 kg)	4444 lbs. (2020 kg)	UN31A/Y
300 gal. (1113 l)	42" (1066 mm)	48" (1219 mm)	45" (1143 mm)	440 lbs. (197 kg)	5192 lbs. (2360 kg)	UN31A/Y
350 gal. (1298 l)	42" (1066 mm)	48" (1219 mm)	51" (1295 mm)	475 lbs. (215 kg)	6017 lbs. (2735 kg)	UN31A/Y
550 gal. (2040 l)	42" (1066 mm)	48" (1219 mm)	75" (1905 mm)	650 lbs. (295 kg)	9350 lbs. (4250 kg)	UN31A/Y
793 gal. (3000 l)	54" (1371 mm)	54" (1371 mm)	77" (1956 mm)	1010 lbs. (404 kg)	13,456 lbs. (6103 kg)	UN31A/Y

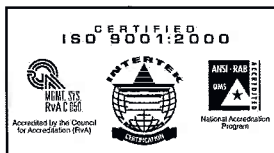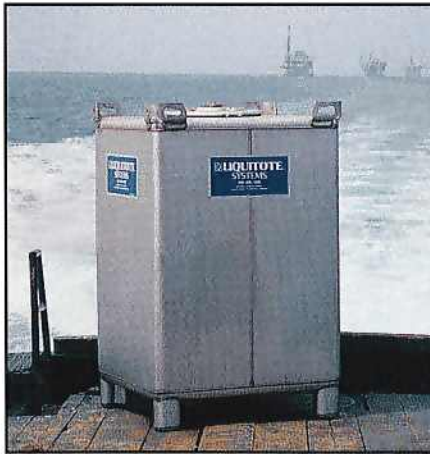

**HOOVER MATERIALS
HANDLING GROUP, Inc.**

Responsible Care®
Good Chemistry at Work

8801 Wallisville Road • Suite A • Houston, Texas 77029 • 800-844-8683 • 713-678-8683
12725 Morris Road • Suite 310 • Alpharetta, Georgia 30004 • www.HooverSolutions.com

05/04 ©2004 Hoover Materials Handling Group, Inc. All rights reserved.

The Liquitote® 793 was manufactured in a plant whose quality management system is registered as being in conformity with ISO 9001:2000.